

LEXAN™ 9034+ 903XXX SHEET

PRODUCT DATASHEET

DESCRIPTION

LEXAN™ 9034 based polycarbonate sheet is the standard grade of LEXAN sheet. Inherently high impact LEXAN 9034 sheet is an excellent candidate for glazing for economical protection against breakage or intrusion. As LEXAN has, better insulation properties than glass it may contribute to lower energy costs. LEXAN 9034 sheet may be thermoformed, pressure formed, cold-formed or used in flat applications.

Applicable to:

- 9034* (applicable for all other uncoated LEXAN grades designated with 903xxxx nomenclature)
- 9034V – with improved UL rating
- 9034HO – with improved optical specifications
- 90316, 90317 and 90318 – “Protect-A-Glaze” with one side textured

TYPICAL PROPERTY VALUES

PROPERTY	TEST METHOD	UNITS	VALUE 9034 *	9034V	9034HO
PHYSICAL					
Specific Gravity	ASTM D792	-	1.20	1.20	1.20
Refractive Index @ 77°F	ASTM D542A	-	1.586	1.586	1.586
Light Transmission (Average at 0.118")	ASTM D1003	%	86	86	86
Initial Haze		HU	<1	<1	<1
Rockwell Hardness (M scale)	ASTM D785	-	70	70	70
Rockwell Hardness (R scale)	ASTM D785		118	118	118
Taber @ 100 cycles	ASTM D1044				
	(ANSI ZI26.1)	% haze	10	10	10
Water Absorption, 24 hrs	ASTM D570	%	0.15	0.15	0.15
Water Absorption, Equilibrium	@ 73°F	%	0.35	0.35	0.35
MECHANICAL					
Tensile Strength, Yield	ASTM D638	psi	9,500	9,500	9,500
Tensile Modulus	ASTM D638	psi	345,000	345,000	345,000
Flexural Strength	ASTM D790	psi	13,500	13,500	13,500
Flexural Modulus	ASTM D790	psi	345,000	345,000	345,000
Compressive Strength	ASTM D695	psi	12,500	12,500	12,500
Compressive Modulus	ASTM D695	psi	345,000	345,000	345,000
Poisson's Ratio	ASTM E132	-	0.37	0.37	0.37
Izod Impact Strength Notched @ 0.118"	ASTM D256A	ft-lbs/in	12-16	12-16	12-16
Unnotched @ 0.118"			60	60	60
			(no failure)	(no failure)	(no failure)
Shear Strength @ Yield	ASTM D732	psi	6,000	6,000	6,000
Shear Modulus	ASTM D732	psi	114,000	114,000	114,000
THERMAL					
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75 x10 ⁻⁵	3.75 x10 ⁻⁵	3.75 x10 ⁻⁵
Coefficient of Thermal Conductivity	ASTM C177	Btu • in/hr • ft ² • °F	1.35		1.35
Specific Heat @ 40°C	ASTM C351	BTU/lb • °F	0.30		0.30
Heat Deflection Temperature @ 264 psi	ASTM D648	°F	270	266	270
@ 66 psi			280		280
Brittle Temperature (on resin)	ASTM D746	°F	-211	-211	-211

PROPERTY	TEST METHOD	UNITS	VALUE 9034 *	9034V	9034HO
FLAMMABILITY					
Horizontal Burn (Flame Spread) AEB	ASTM D635	in	<1		<1
Ignition Temperature, Self		°F	>1000	>1000	>1000
UL Flammability (File # 121562) Add link to the UL site	UL94HB	Pass/Fail	HB		HB
	UL94VO	Pass/Fail		≥0.236	
	UL94V2	Pass/Fail		≥0.060	
ELECTRICAL					
Dielectric Constant @ 60 Hz	ASTM D150	—	3.17		
Volume Resistivity	ASTM D257	Ohm-cm	8.2 x 10 ¹⁶		
Dissipation Factor (@60 Hz) also known as Power Factor	ASTM D150		0.0009		

◆ These typical values are not intended for specification purposes. If minimum certifiable properties are required please contact your local SABIC representative.

™ Trademark of SABIC.


IMPACT RESISTANCE

¼" LEXAN 9034 sheet

¼" Acrylic

¼" Tempered Glass

¼" Laminated Glass

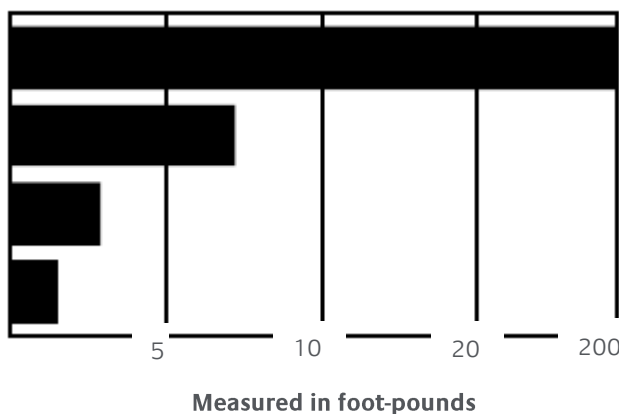

⌋) Drop Dart Test with a 5-lb steel dart and a 1" diameter tip.

CHEMICAL RESISTANCE

LEXAN 9034 sheet has sufficient resistance to most mineral oils, greases, aliphatic hydrocarbons and acids under low or moderate stress levels. Specific (application related) testing is always advised, especially in applications where the LEXAN 9034 sheet will come into contact with aggressive chemicals.

PROCESSING

LEXAN 9034 sheet can be used for thermoforming. It offers high, deep draw ratios, equal wall thickness distribution, and it can be formed into complex shapes using standard thermoforming equipment. Sandwich type heating systems give the best results. LEXAN 9034 sheet has a forming temperature range of 350–400°F. When forming, a draft angle of at least 3° should be allowed, and post mold shrinkage of .007–.009 in/in taken into account.

PRE-DRYING

It is important to ensure that LEXAN 9034 sheet is free of moisture prior to thermoforming. A hot air circulating oven set at 250°F is recommended. Pre-drying times vary from 3–24 hours, depending on sheet thickness.

ASSEMBLING / PAINTING

Parts made from LEXAN 9034 sheet can be assembled with plastics, metals, rubber and other materials using many types of adhesive bonding, welding and mechanical fastening techniques. Since some of these materials can cause environmental stress cracking, please consult SABIC, for advice on specific applications. A list of approved paint systems and suppliers is available upon request.

CODE COMPLIANCE

Underwriters Laboratories LEXAN 903x Sheet is listed as a Burglary-Resisting Glazing Material according to UL Standard 972.

UL File Number: E121562

CONTACT US:

Middle East and Africa

SABIC Global Headquarters
PO Box 5101
Riyadh 11422
Saudi Arabia
T +966 (0) 1 225 8000
F +966 (0) 1 225 9000
E info@sabic.com

Email

sfs.info@sabic.com

Americas

Specialty Film & Sheet
1 Plastics Avenue
Pittsfield, MA 01201
USA
Toll-free 1 800 323 3783
T 1 413 448 6655
F (888) 443 2033
E sales.spinside@sabic.com

Europe

Specialty Film & Sheet
Plasticslaan 1
4612 PX
Bergen op Zoom
The Netherlands
T +31 (0)164 293678
F +31 (0)164 293272
E sfs.info@sabic.com

Asia Pacific

Specialty Film & Sheet
2550 Xiupu Road
Pudong
201319 Shanghai
China
T +86 21 2037 8188
F +86 21 2037 8288
E sfs.info@sabic.com

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.
© 2015 Saudi Basic Industries Corporation (SABIC). All Rights Reserved.

† Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.

www.sabic.com/sfs

